


DESCRIPTION

The RS-170 can call and make converse with the registered master stations.
It utilizes a 2-core shielded cable.

SPECIFICATIONS

Rated Input	1 W
Rated Impedance	625 Ω (1 W/25 V)
Internal Speaker	4 cm cone-type
Wiring	Two-core shielded cable
Transmission Range	0.5 km (546 yd)/ ϕ 0.5 mm (AWG24) 0.8 km (874 yd)/ ϕ 0.65 mm (AWG22) 1.3 km (1421 yd)/ ϕ 0.9 mm (AWG19)
Operating Temperature	-10 °C to +50 °C (Temperature range not to freeze the speaker and switch)
Finish	Panel: Stainless steel, hairline Call button: Metal Printed circuit board: Weather-resistant coating
Dimensions	120 (W) \times 120 (H) \times 57.5 (D) mm
Weight	540 g
Accessory	Box mounting screw (No.6-32UNC \times 8)4, Box mounting screw (M4 \times 25)4

APPEARANCE

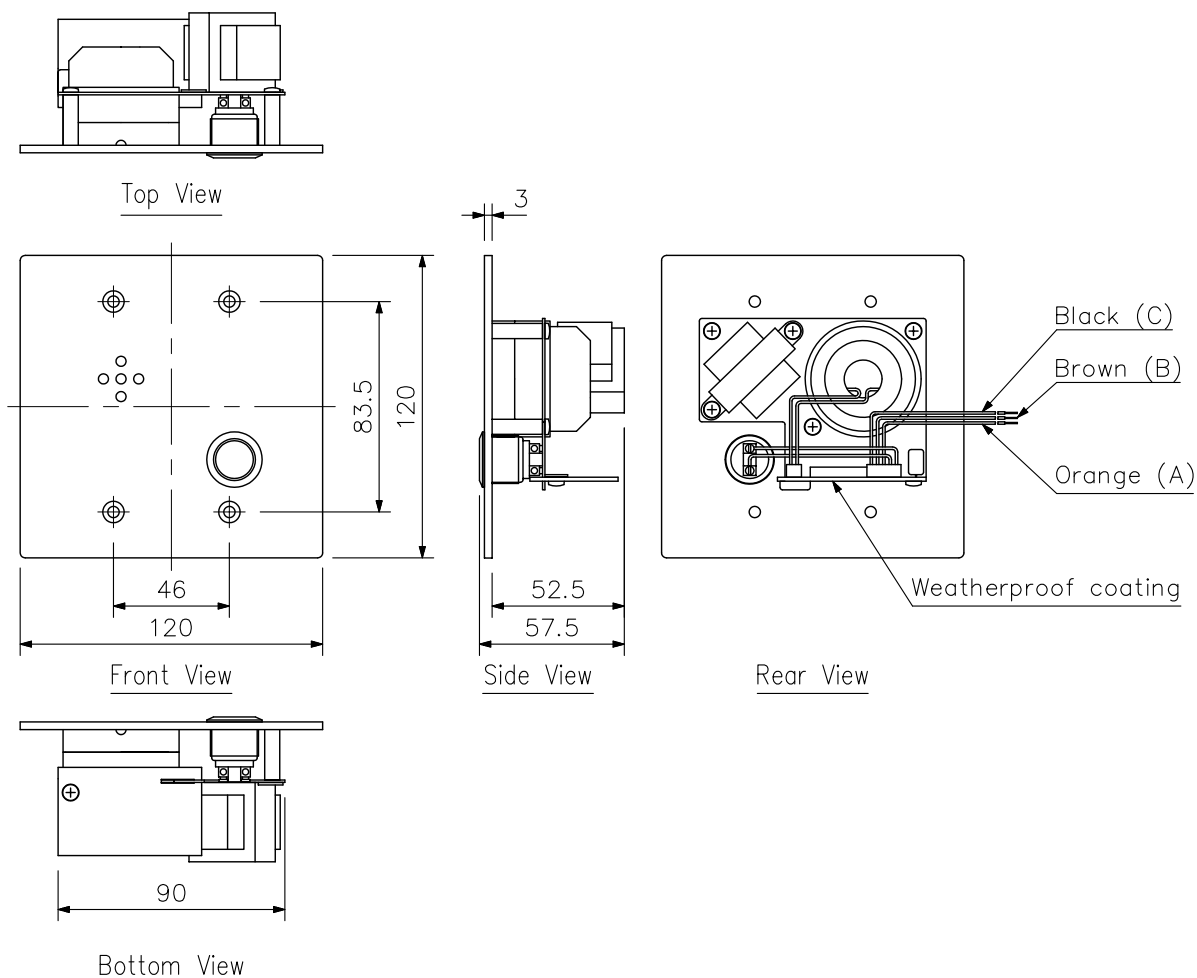

UNIT:mm SCALE:1/3