



MW-41BT Bluetooth ID Renaming Tool Instructions



Table of Contents

INTRODUCTION	3
PREREQUISITES	3
IP Audio Terminal Config Tool	3
RESET PROCEDURE.....	3

INTRODUCTION

This manual covers the instructions on how to custom re-name the Bluetooth ID of the MW-41BT.

PREREQUISITES


IP Audio Terminal Config Tool

This procedure requires the MW-41BT Bluetooth ID Renaming Tool. The software is available for download on the MW-41BT Page at



www.toacanada.com


BLUETOOTH ID RENAMING PROCEDURE

1. Download the MW-41BT Bluetooth ID Renaming Tool and extract the software.

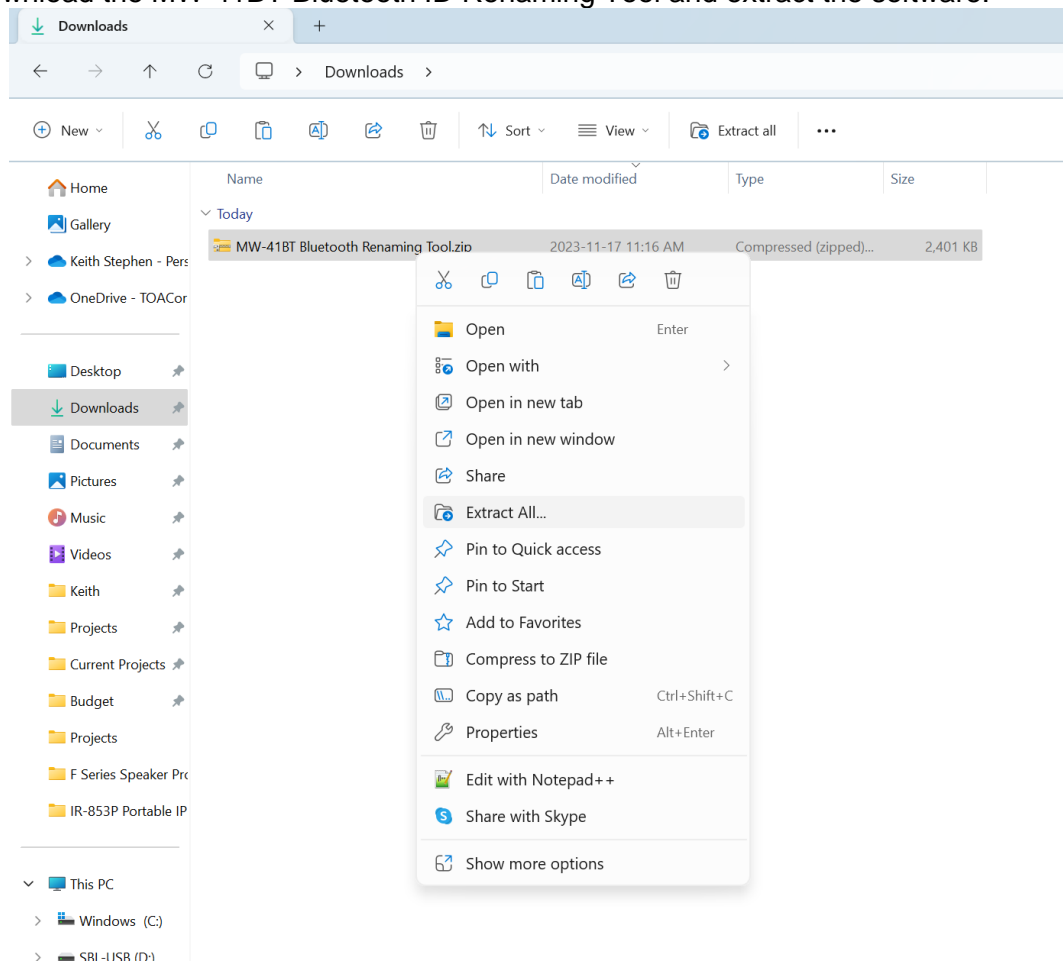


2. Format a clean USB drive and copy the MW-41BT firmware on it.
- 3.

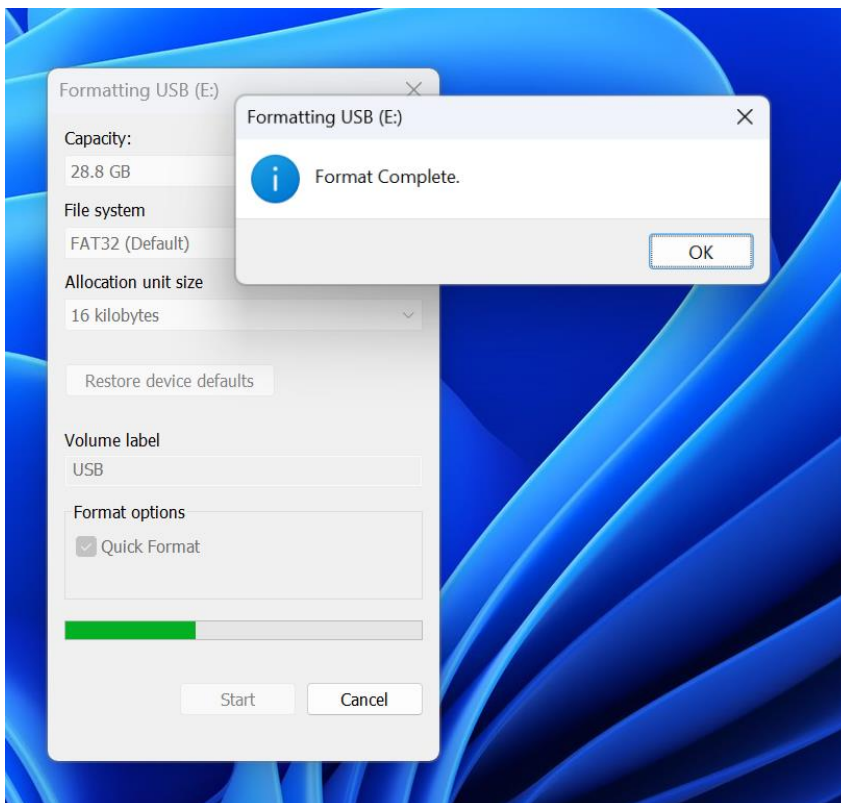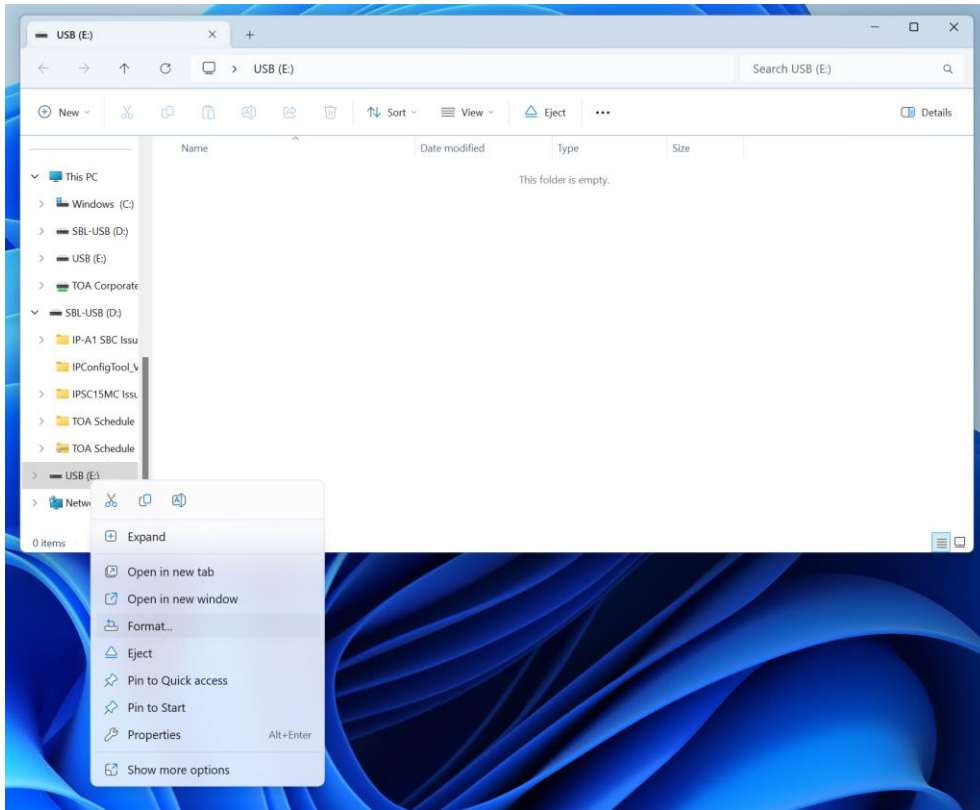

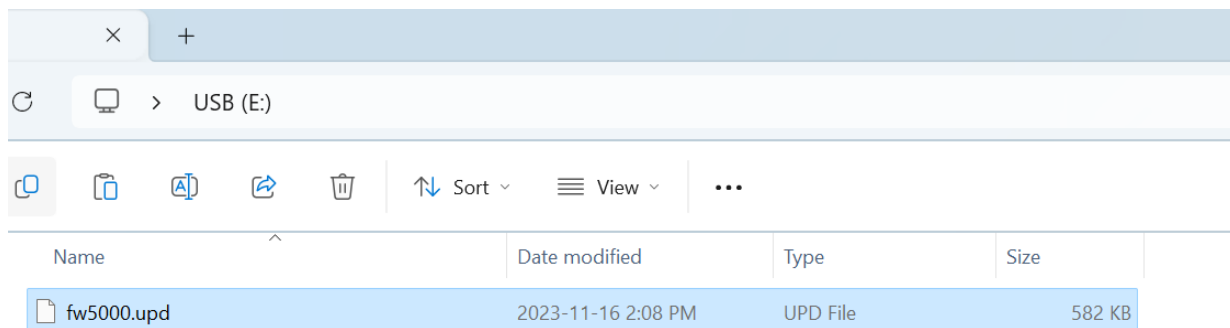


4. Open the extracted folder and launch “Downloader.exe”. On Windows 11, this may require you to click “More info” and then click “Run Anyway”


dis	2023-11-17 11:18 AM	File folder	
en	2023-11-17 11:18 AM	File folder	
ScanGun	2023-11-17 11:18 AM	File folder	
Downloader.exe	2023-11-17 11:18 AM	Application	2,257 KB

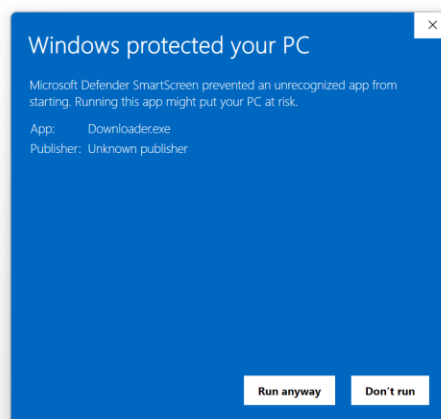



After launching click “Language” on the top right of the menu and switch to “English”.

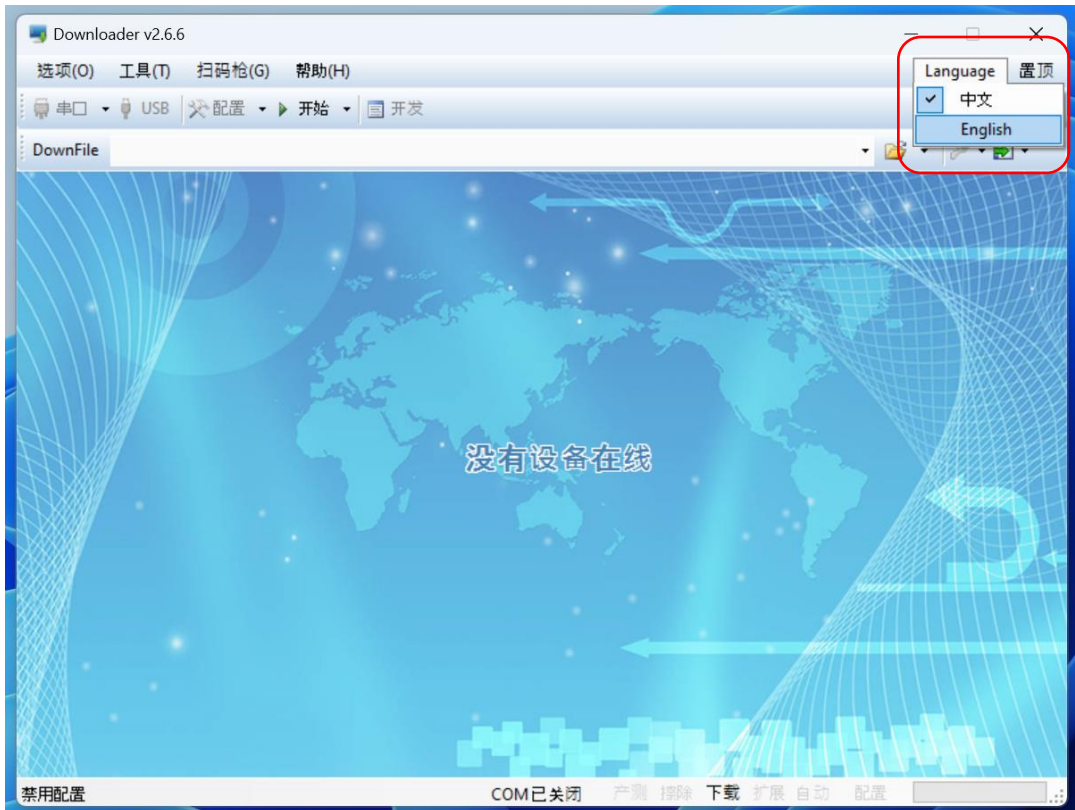

5. Navigate and select the firmware file located in your USB drive.

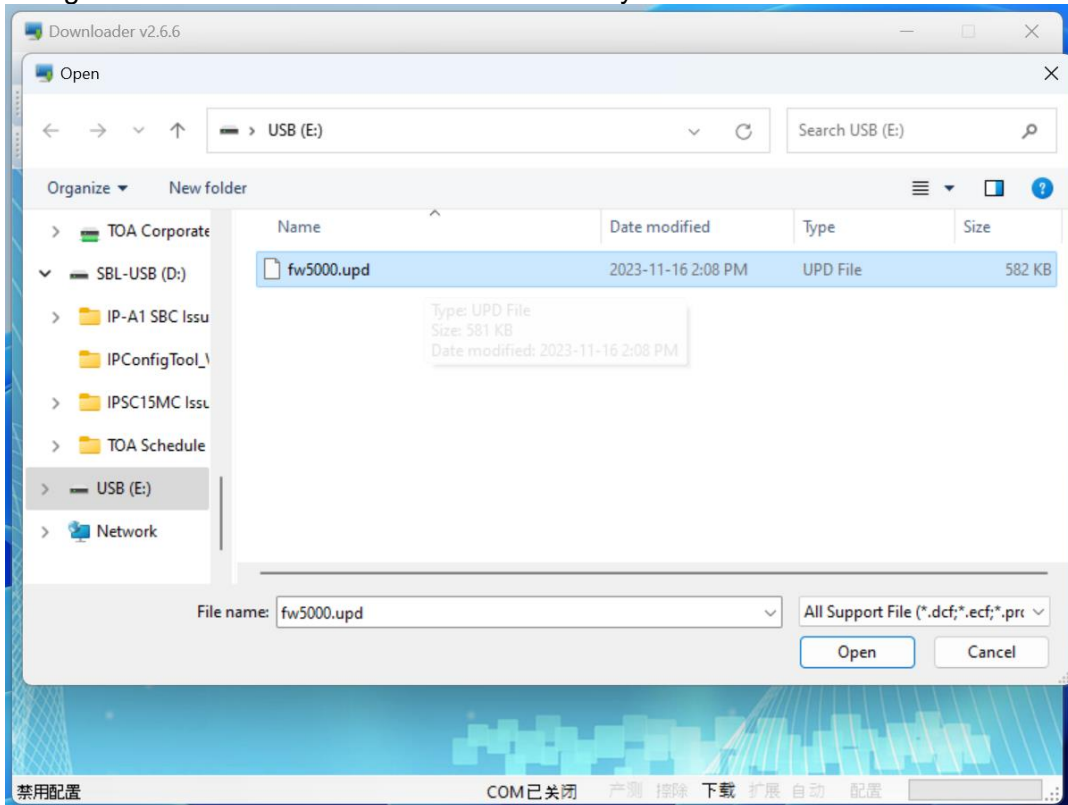

6. Click “Config” and change the name on the field shown below and save.

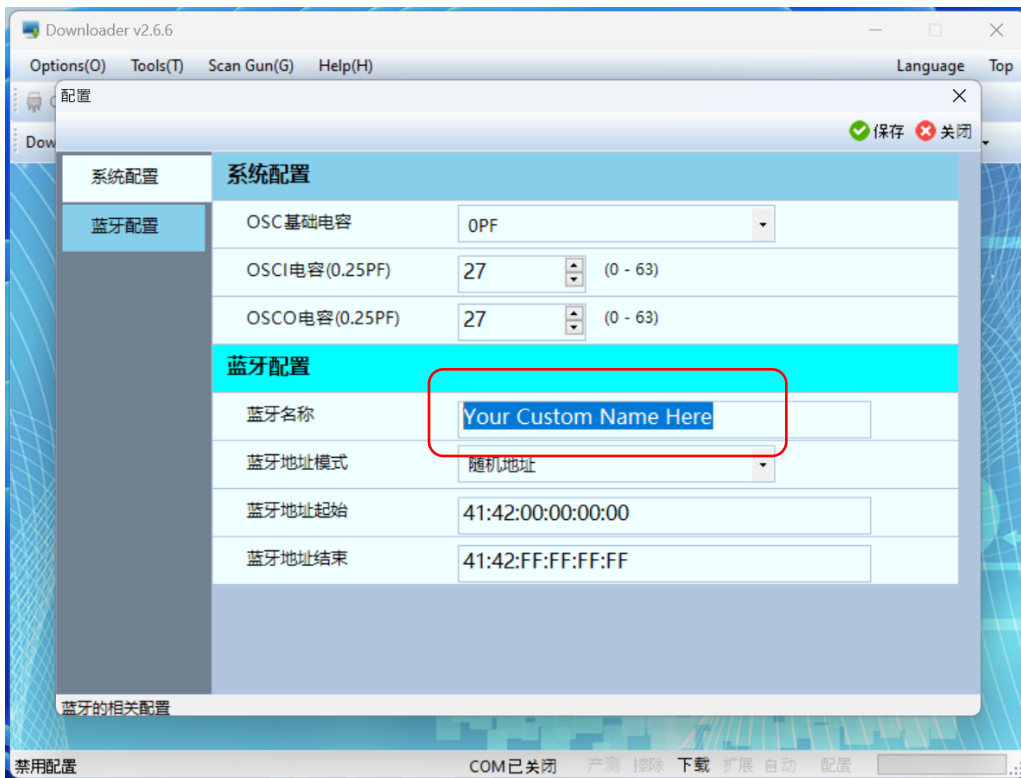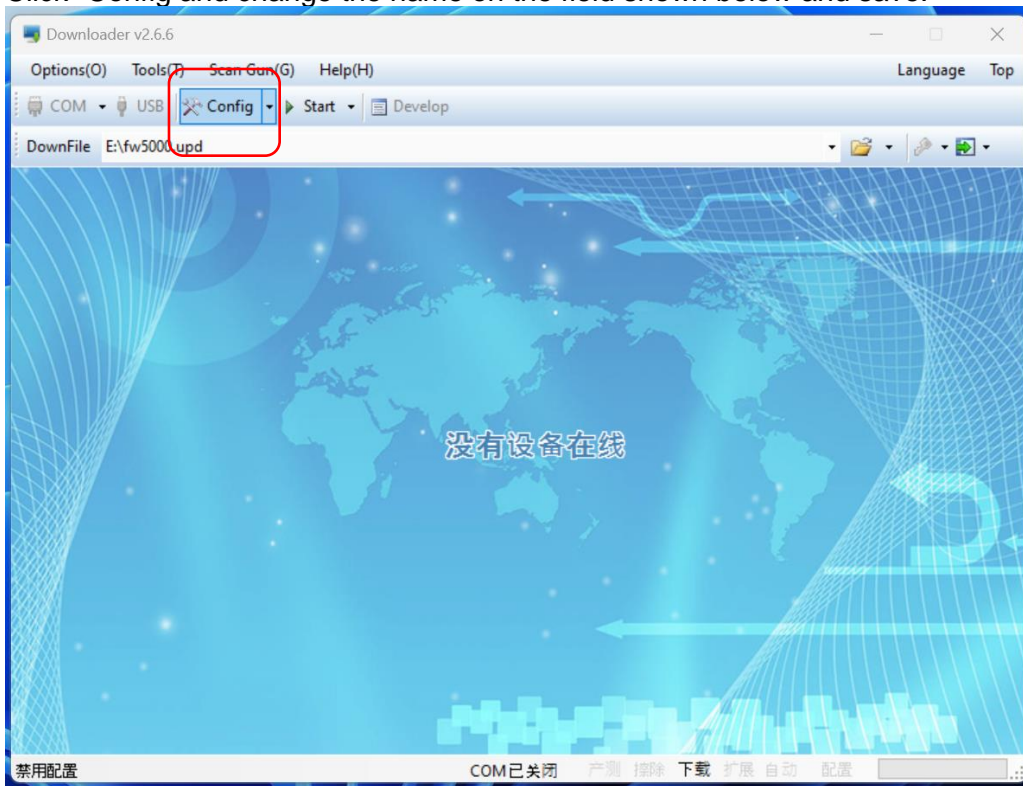



7. The firmware on your USB device will now have a customized name. Flash this firmware on the MW-41BT you wish to adjust the BT ID (See MW-41BT Firmware Update Instructions).
8. After the MW-41BT is updated using the new firmware, the device will now broadcast the custom Bluetooth ID you specified.